





APCD225 Data Sheet

8" x 8" Auto Prime Pump

Pump and parts 100% interchangeable with Godwin CD Series®

Performance Curve

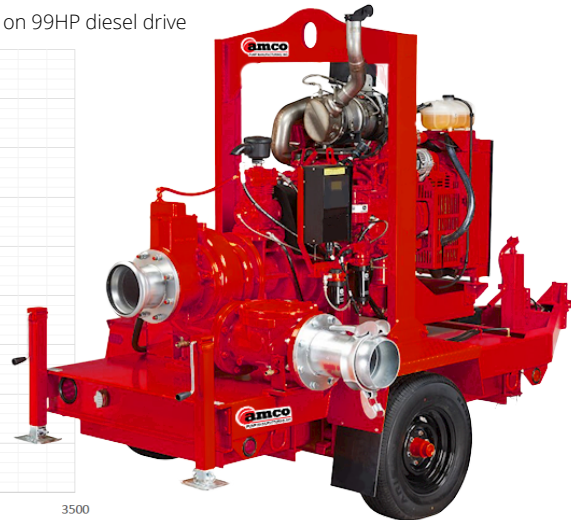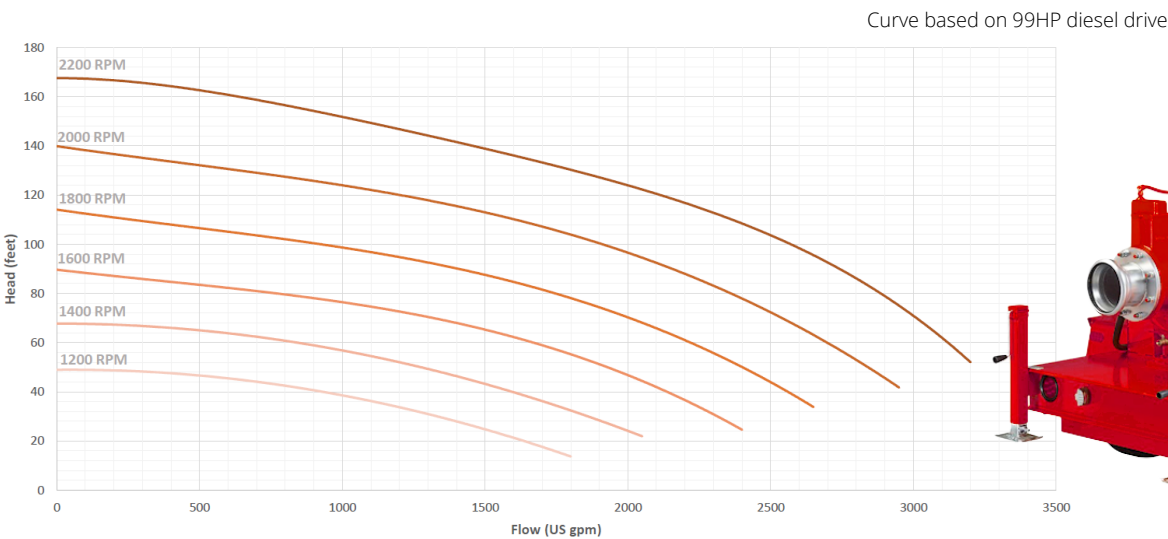

General Specifications

Suction Connection	8 in (200 mm) Flange
Delivery Connection	8 in (200 mm) Flange
Max Flow	3240 USGPM (145 L/s)
Max Head	165 ft (50 m)
Max Solids Handling	3 in (75 mm)
Fuel Capacity	160 US Gal (605 L)
Impeller Diameter	11 in (290 mm)

Features

- Automatically primes up to 28 ft (8.5 m) of suction lift from dry
- Liquid bath mechanical seal design extended dry-running time
- Durably constructed using Cast Iron, Steel and CDM4CU material
- 12-month standard warranty
- Suitable for many applications. Industries we serve include:

Options

- Diesel or Electric Drive
- Integrated Fuel Tank
- Skid Mount
- Custom DOT Trailer
- Options
- Quiet Pack: Sound Enclosure to 69 dBA at 30'



713-690-7575
 sales@amcopumps.com
 www.amcopumps.com
 4849 Cranswick Rd
 Houston TX 77041

Quality Pumps, For Less. By Professional Pump People.

A typical picture of an open-unit pump is shown. Please contact Amco Pump Manufacturing for further details. Godwin is a trademark of Xylem Dewatering Solutions, Inc. Amco Pump Manufacturing, Inc. is not associated with or sponsored by Xylem Dewatering Solutions, Inc. All information is approximate and for guidance only. *Larger diameter pumps may be required for maximum head and flow values